


Cunningham 
Radiotron
RCA-6A4

6A4

POWER AMPLIFIER PENTODE

This type is also known as "LA"

Filament	Coated	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Maximum Overall Length		4-11/16"
Maximum Diameter		1-13/16"
Bulb		ST-14
Base	③	Medium 5-Pin
Pin 1-Filament+	②	Pin 4-Screen
Pin 2-Plate	④	Pin 5-Filament-
Pin 3-Grid	① ⑤	

BOTTOM VIEW

AMPLIFIER (Class A)

Operating Conditions and Characteristics:

Filament	6.3	6.3	6.3	6.3	d-c volts
Plate	100	135	165	<u>180 max.</u>	volts
Screen	100	135	165	<u>180 max.</u>	volts
Grid*	-6.5	-9	-11	-12	volts
Amp. Fact. (approx.)	100	100	100	100	
Plate Res.	83250	52600	48000	45500	<u>approx. ohms</u>
Mut. Cond.	1200	1900	2100	2200	μmhos
Plate Cur.	9	14	20	22	ma.
Screen Cur.	1.6	2.5	3.5	3.9	ma.
Load Res.	11000	9500	8000	8000	ohms
Self-Bias Res. [□]	615	545	470	465	ohms
P.O. [○]	0.31	0.7	1.2	1.4	watts

[○] 9% total harmonic distortion.

If a single 6A4 is operated self-biased, the self-biasing resistor should be shunted by a suitable filter network to avoid degenerative effects at low audio frequencies. The use of two 6A4's in push-pull eliminates the necessity for shunting the resistor.

[□] For a push-pull stage with two 6A4's, the self-biasing resistor is one-half of the value for single tube operation.


Transformer or impedance input-coupling devices are recommended. If resistance coupling is employed, the grid resistor should not exceed 0.5 megohm.

* Grid volts measured from negative end of d-c operated filament. If the filament is a-c operated, the tabulated values of grid bias should each be increased by 4.0 volts and be referred to the mid-point of the filament.

6A4

Cunningham
Radiotron
RCA-6A4

AVERAGE PLATE CHARACTERISTICS

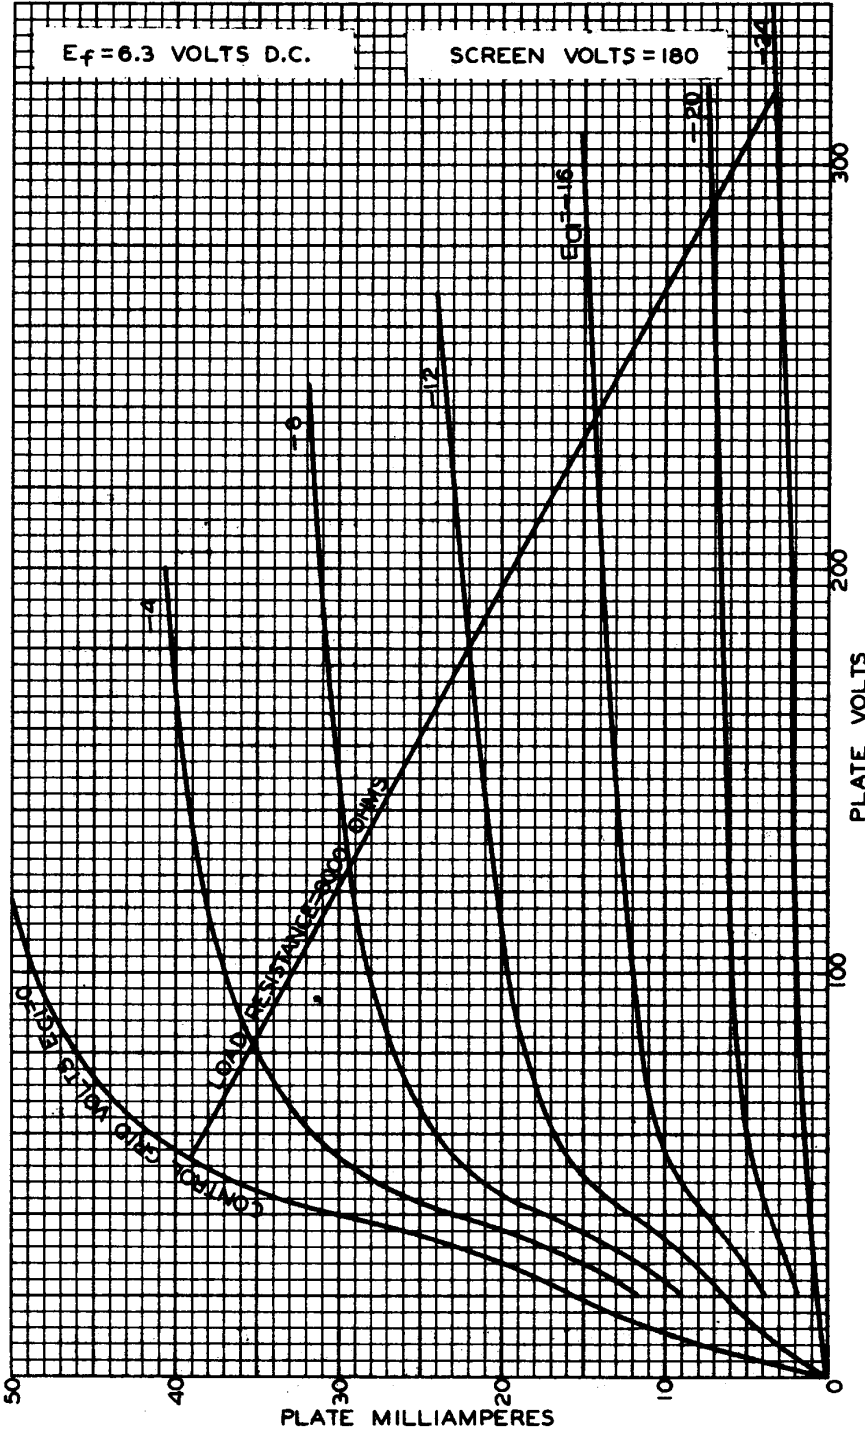

JUNE 20, 1933

RCA RADIORON DIVISION
RCA MANUFACTURING COMPANY, INC.

925-5336