





6ZY5-G



FULL-WAVE HIGH-VACUUM RECTIFIER


Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Maximum Overall Length		4-1/8"
Maximum Seated Height		3-9/16"
Maximum Diameter		1-9/16"
Bulb		ST-12
Base		Small Shell Octal 6-Pin
Pin 1 - No Connection		Pin 5 - Plate #1
Pin 2 - Heater		Pin 7 - Heater
Pin 3 - Plate #2		Pin 8 - Cathode
Mounting Position		Any



BOTTOM VIEW (G-6S)
FULL-WAVE RECTIFIER

Peak Inverse Voltage	1250 max. volts
Peak Plate Current per Plate	120 max. ma.
D-C Heater-Cathode Potential	450 max. volts
<i>With Condenser-Input Filter:</i>	
A-C Plate Voltage per Plate (RMS)	325 max. volts
Total Effective Plate-Supply Impedance per Plate [▲]	225 min. ohms
D-C Output Current	40 max. ma.
<i>With Choke-Input Filter:</i>	
A-C Plate Voltage per Plate (RMS)	450 max. volts
Input-Choke Inductance	13.5 min. henries
D-C Output Current	40 max. ma.

[▲] When a filter-input condenser larger than 40 μ f is used, it may be necessary to use more plate-supply impedance than the minimum value shown to limit the peak plate current to the rated value.

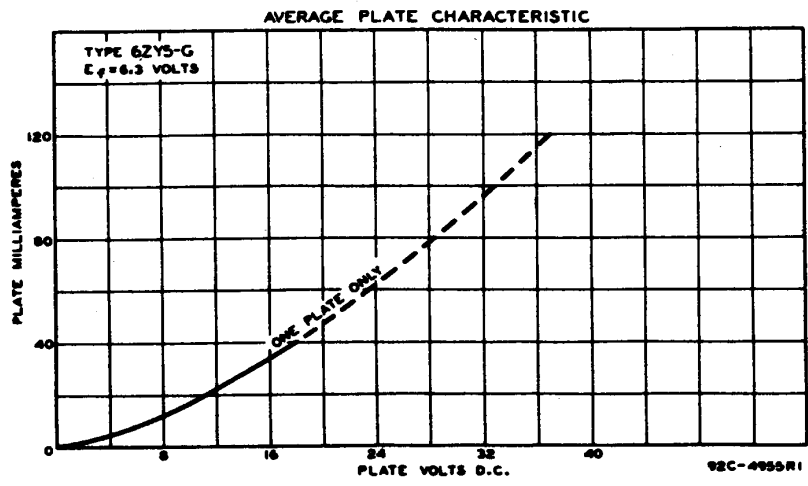

← Indicates a change.

Dec. 1, 1941

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


DATA

6ZY5-G



6ZY5-G

OPERATION CHARACTERISTICS

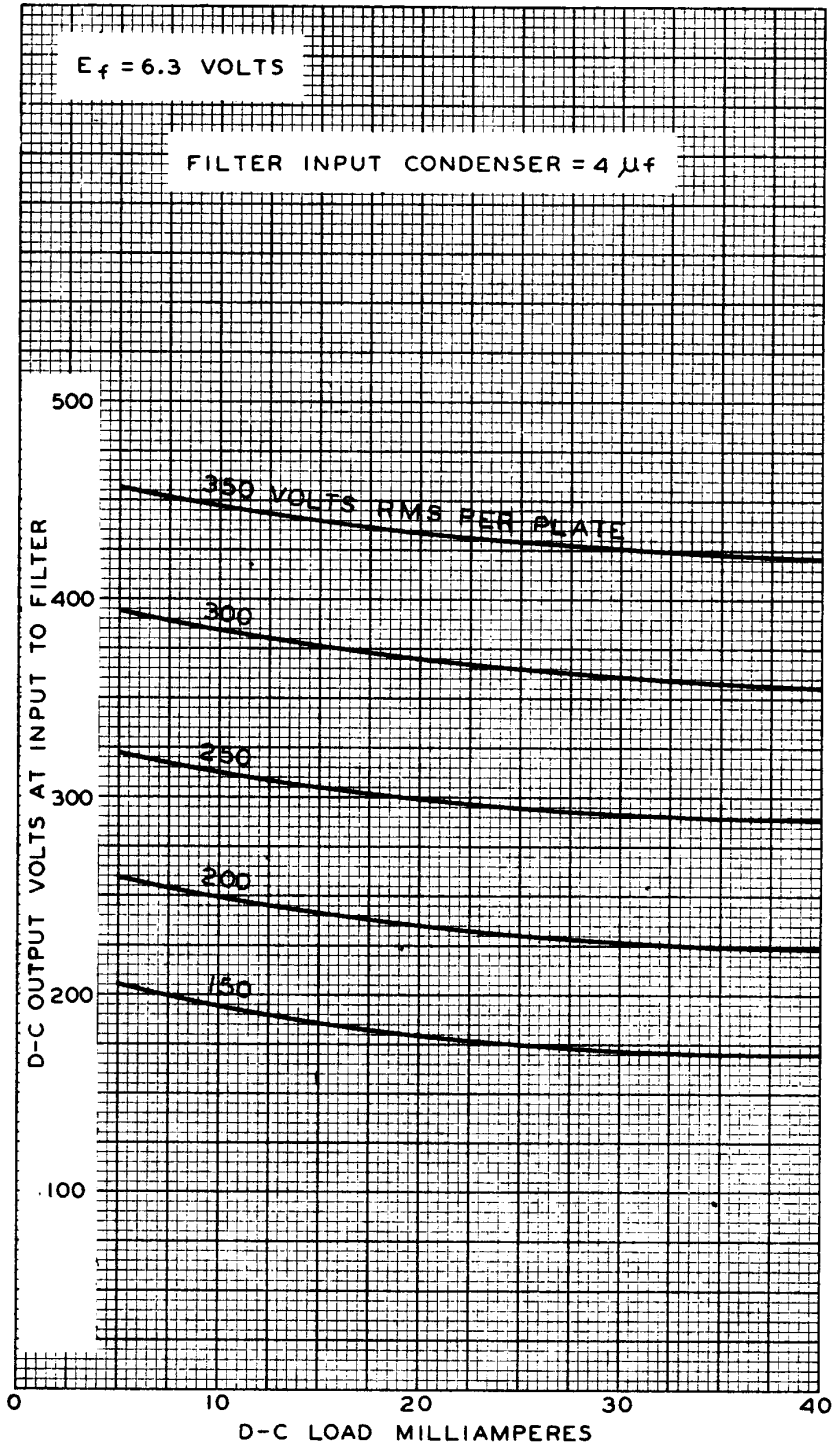

SEPT. 9, 1941

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4952RI